

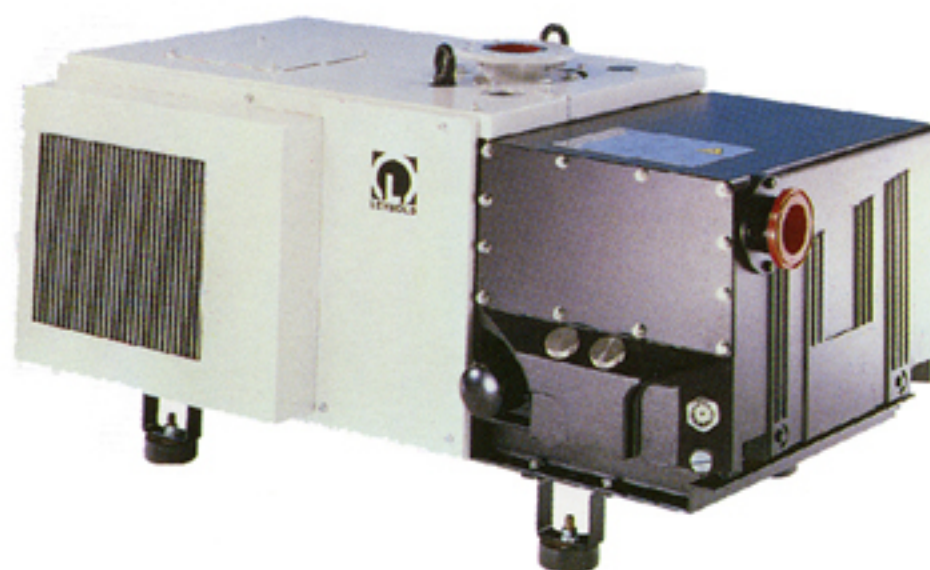


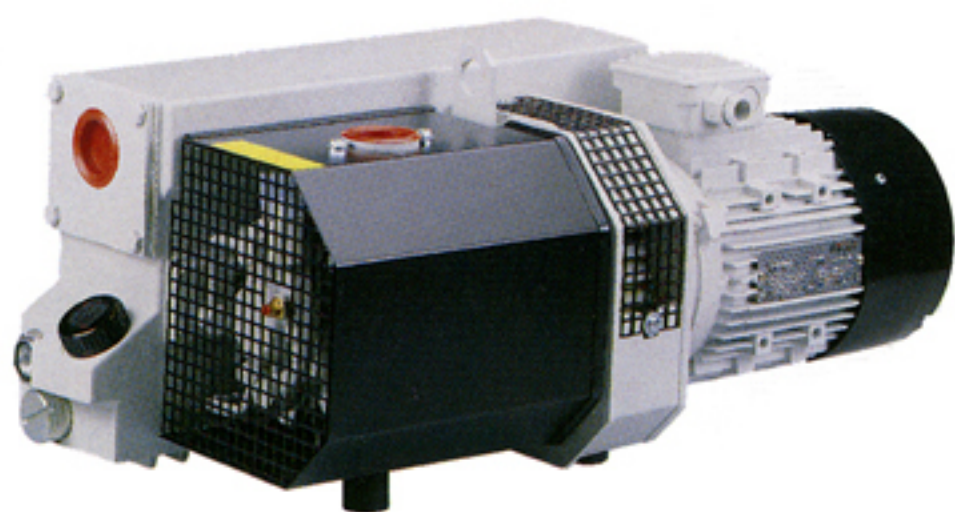

SV泵浦特性表

SOGEVAC			SV-10B	SV-16B	SV-25B	SV-40B	SV-65B	SV-100B
标准抽速(欧州标准)		m3/h	11	16	26	44	59	97.5
抽速(按照PNEUROP)标准		m3/h	9.5	15	22.5	38.5	54	87.5
关气镇阀极限压强		mbar	≤1	≤1	≤0.5	≤0.5	≤0.5	≤0.5
开气镇阀极限压强		mbar	≤2	≤2	≤0.8	≤1.5	≤1.5	≤1.5
水汽允许压强	(带一个小气镇阀)	mbar	—	—	—	10	10	15
	(带一个标准镇阀)	mbar	10	10	10	30	30	30
	(带一个大气镇阀)	mbar	—	—	—	—	—	—
	(带两个气镇阀)	mbar	—	—	—	—	—	—
开气镇阀时最大水汽抽量	(带一个小气镇阀)	kg/h	—	—	—	0.28	0.36	0.45
	(带一个标准镇阀)	kg/h	0.02	0.03	0.085	0.76	1	1.6
	(带两个气镇阀)	kg/h	—	—	—	—	—	—
噪音 (50Hz, 三相电机)		dB(A)	60	60	64	60	60	61
注油量		L	0.5	0.5	0.5	1.0	2.0	2.0
重量(注油,三相电机)		kg	20	20	26	43	49	75
转子转速(50Hz)		min-1	—	—	—	—	—	—
电机转速(50Hz)		min-1	3000	3000	3000	1500	1500	1500
进气口		—	G3/4"+G1/2"	G3/4"+G1/2"	G3/4"+G1/2"	G1 1/4"	G1 1/4"	G1 1/4"
排气口		—	—	—	G3/4"	G1 1/4"	G1 1/4"	G1 1/4"
电机功率50Hz		KW	0.55	0.55	0.9	1.1	1.5	2.2
防护等级		IP	55-F	55-F	55-F	55-F	55-F	55-F
尺寸(长×宽×高)		—	315×281×199	315×281×199	356×275×246	425×284×265	480×320×264	695×400×270
订购信息IEC(欧州)	50Hz三相电机(带气镇阀)	230V/400V	960 100	960 160	960 251	960 305	960 405	960 505
	50Hz单相电机(带气镇阀)	230V	960 105	960 165	960 256	—	—	—

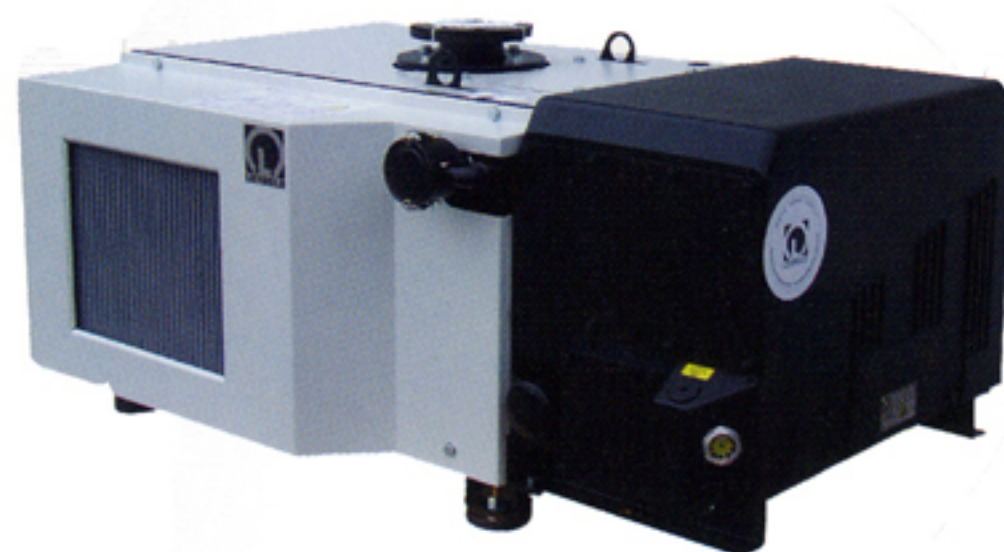

SV泵浦特性表

SOGEVAC			SV-200	SV-300	SV-500	SV-630	SV-630F	SV-750	SV-1200
标准抽速(欧州标准)		m3/h	180	280	570	700	700	840	1150
抽速(按照PNEUROP)标准		m3/h	170	240	510	640	640	755	1070
关气镇阀极限压强		mbar	$\leq 8 \times 10^{-2}$	$\leq 8 \times 10^{-2}$	$\leq 8 \times 10^{-2}$	$\leq 8 \times 10^{-2}$	$\leq 8 \times 10^{-2}$	$\leq 8 \times 10^{-2}$	≤ 0.1
开气镇阀极限压强		mbar	≤ 0.7	≤ 0.7	≤ 1	≤ 0.7	≤ 0.7	≤ 0.7	≤ 1.5
水汽允许压强	(带一个小气镇阀)	mbar	—	—	—	—	—	—	—
	(带一个标准镇阀)	mbar	30	30	40	40	25	50	20
	(带一个大气镇阀)	mbar	50	50	—	—	—	—	—
	(带两个气镇阀)	mbar	—	—	60	60	35	70	40
开气镇阀时最大水汽抽量	(带一个小气镇阀)	kg/h	—	—	—	—	—	—	—
	(带一个标准镇阀)	kg/h	3.4	5.4	13	17	11	24	12.5
	(带两个气镇阀)	kg/h	—	—	19.5	26	15	34	25
噪音 (50Hz, 三相电机)		dB(A)	69	70	71	≤ 75	≤ 75	≤ 78	75
注油量		L	5.0	8.5	35	35	35	35	60
重量(注油,三相电机)		kg	140	180	630	630	630	630	1370
转子转速(50Hz)		min-1	—	—	880	990	990	1170	700
电机转速(50Hz)		min-1	1450	1450	1500	1500	1500	1500	1460
进气口		—	G2"	G2"	DN100PN10 & 100ISO-K	DN100ISO-K+100PN10	DN160DIN	DN100ISO-K+100PN10	DN125PN10
排气口		—	G2"	G2"	DNΦ80或DN100PN10 & 100ISO-K	DNΦ80或100ISO-K	DN100ISO-K	DNΦ80或100ISO-K	DN160ISO-K或DN125PN10
电机功率50Hz		KW	4	5.5	11	15	15	18.5	22
防护等级		IP	55	55	54-F	54-F	54-F	54-F	54
尺寸(长×宽×高)		—	940×535×415	1080×535×415	1543×894×780	1606×880×800	1601×878×698	1606×880×800	1660×1005×1050
订购信息IEC (欧州)	50Hz三相电机(带气镇阀)	230V/400V	109 27	109 31	956 55	956 63	956 67	956 75	109 70
	50Hz单相电机(带气镇阀)	230V	—	—	—	—	—	—	—